


# Micro Double Pump - B162

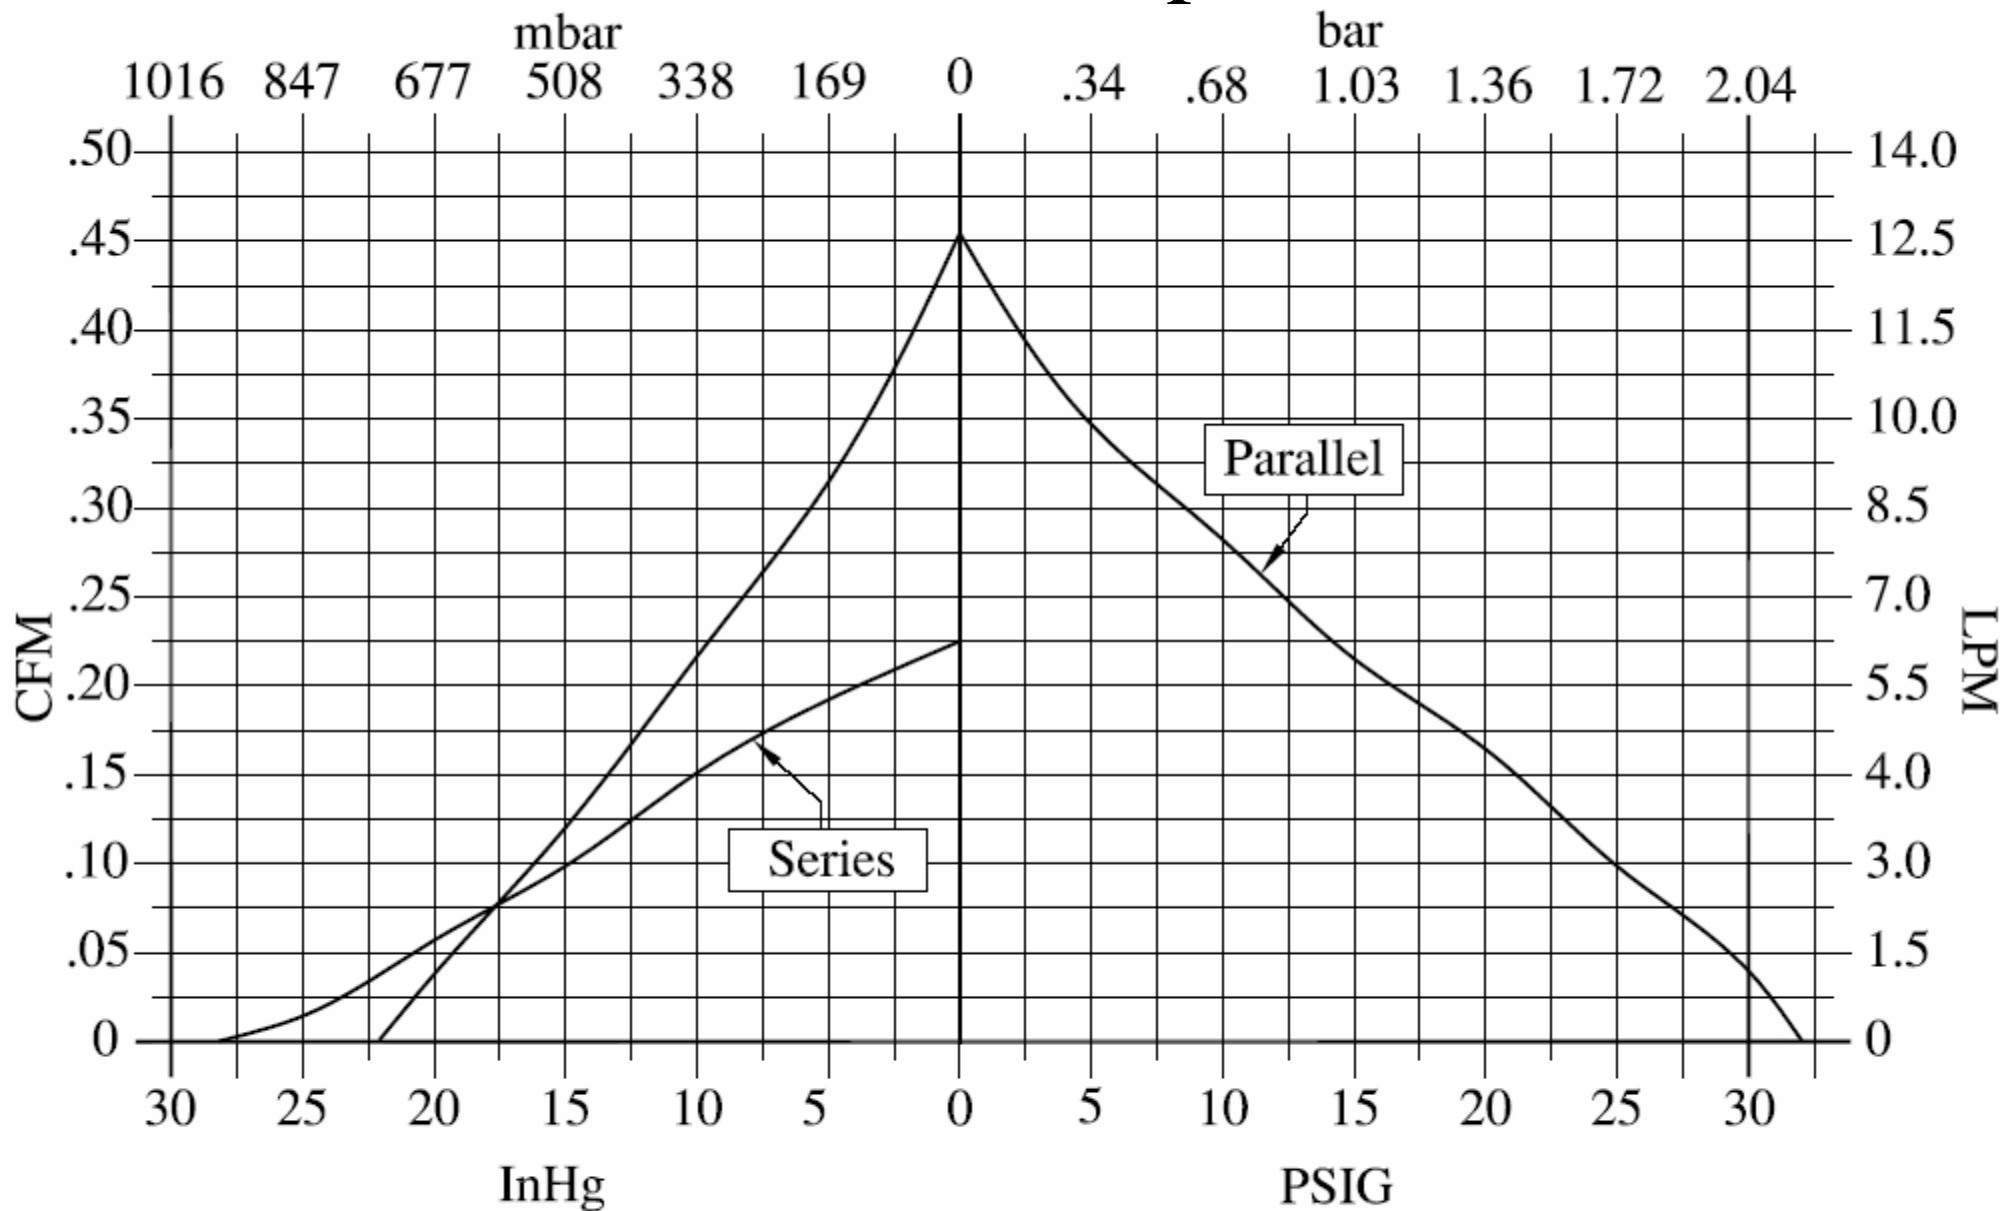

**Notes:** Standard continuous performance ratings listed above are at sea level with an ambient temperature of 75° F (24° C) and 60Hz electrical supply. Performance characteristics given are for reference only. Specifications are subject to change without notice.  
 \*For 50Hz reduce Flow only by 17%.