


# Double Head Hi Speed Pump - R222

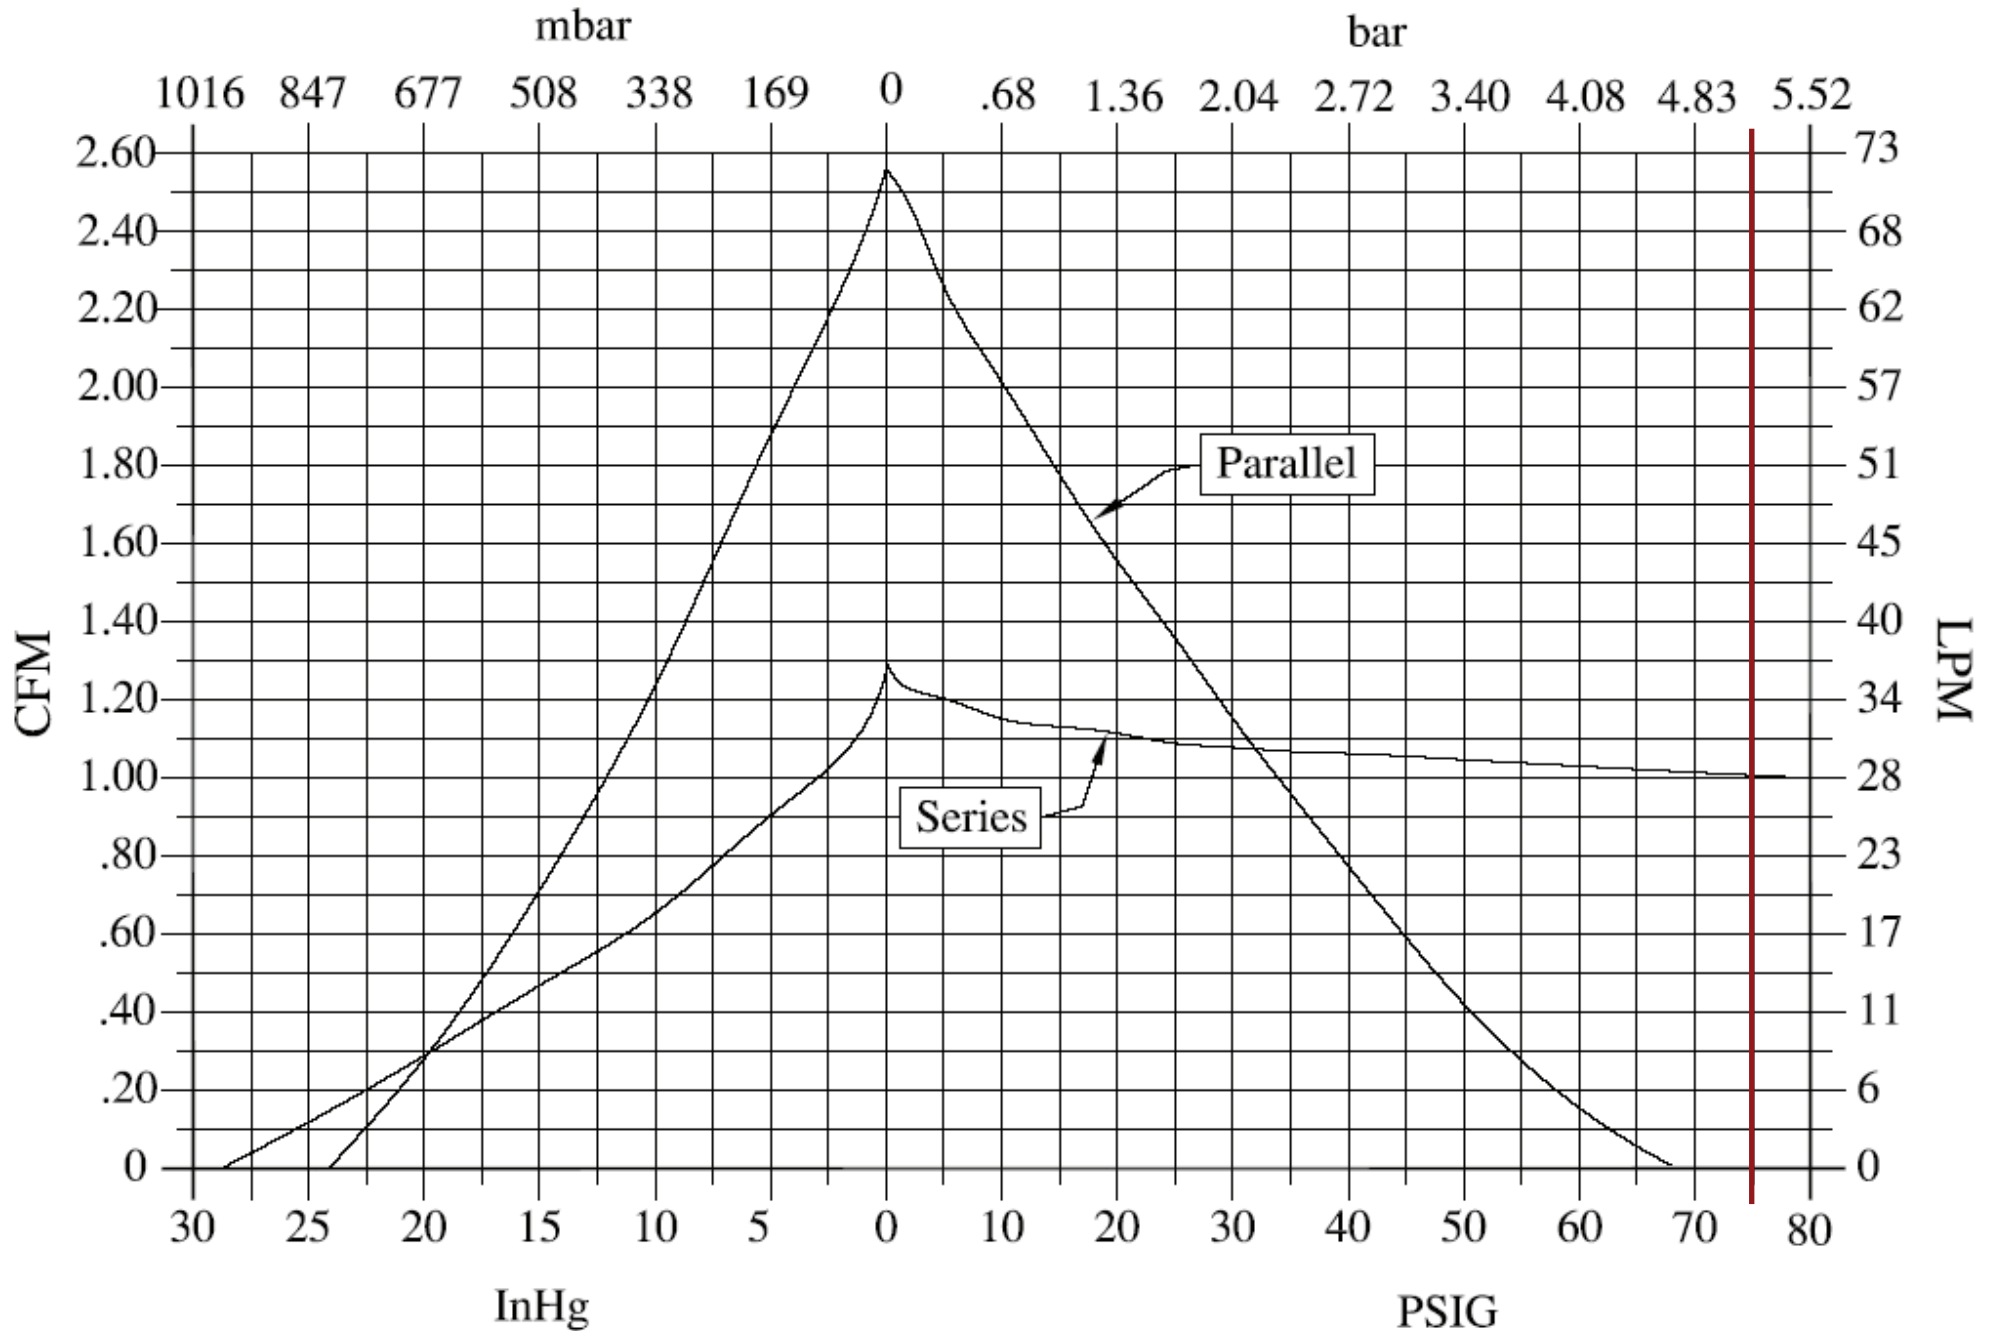

**Notes:** Standard continuous performance ratings listed above are at sea level with an ambient temperature of 75° F (24° C) and 60Hz electrical supply. Performance characteristics given are for reference only. Specifications are subject to change without notice. **Note that ADI does not recommend pressures in excess of 75 PSIG.** \*For 50Hz reduce Flow only by 17%.